



Maxx Cold X-series | The Legacy Companies
 3355 Enterprise Avenue, Suite 160, Fort Lauderdale, FL 33331
 (954) 202-7419 • Fax (954) 202-7337 • (877) 600-8401
 www.MaxximumFoodService.com • Info@MaxxColdFoodService.com

Project Name: _____
 Location: _____
 Item #: _____ Qty: _____
 Model: _____

MEGATOP UNITS

Model: MXCR29M MXCR48M MXCR60M MXCR72M

International Model:
 Add -50 (220V/50Hz/1Ph)



MXCR29M



MXCR48M



MXCR60M



MXCR72M

Maxx Cold X-Series Mega Tops offer additional pan space for increased capacity and flexibility. A high quality stainless steel exterior allows for easy cleaning and ensures durability and years of reliable service. A heavy duty stainless steel insulated hood keeps products cool and fresh.

FEATURES

- Easy to grip recessed door handles
- 4 Casters (2 locking, 2 non-locking)
- Adjustable, heavy-duty wire shelves (1 per section/door)
- Single door section (20" wide) will hold full sized sheet pans
- Available in multiple sizes to suit your needs
- Available in 120V/60Hz, 220V/50Hz & 220V/60Hz

TEMPERATURE

- Holding temperature: 33° to 41°F (1° to 5°C)
- Utilizes environmentally friendly refrigerant R134A
- Forced-air refrigeration
- Efficient cooling system

CONSTRUCTION

- Exterior Material: Durable, easy to clean stainless steel
- Interior Material: Coated aluminum
- CFC Free Polyurethane insulated walls and doors
- Standard recessed door handles


REFRIGERANT

Environmentally-friendly R-134A propane

ELECTRIC

120/60Hz/1 Ph (NEMA 5-15)
 Cord set includes plug & 9.8' (3m) cord
 220V/50Hz/1 & 220V/60Hz/1 available options

1.27" / 32 mm



NEMA 5-15P



Certified to
 ANSI-NSF 7



Certified to
 ANSI UL 471


Maxx Cold X-Series WARRANTY (USA / CANADA)

One (1) year parts
 One (1) year on-site labor
 Four additional (4) years compressor (part only)
 Administered by The Legacy Companies, 877.368.2797
 24/7 tech support provided

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.

The built in performance enhancing functions ensure that given proper attention and preventative maintenance, each Maxx Product will deliver years of trouble free, reliable, low maintenance, efficient operation.

MEGATOP UNITS

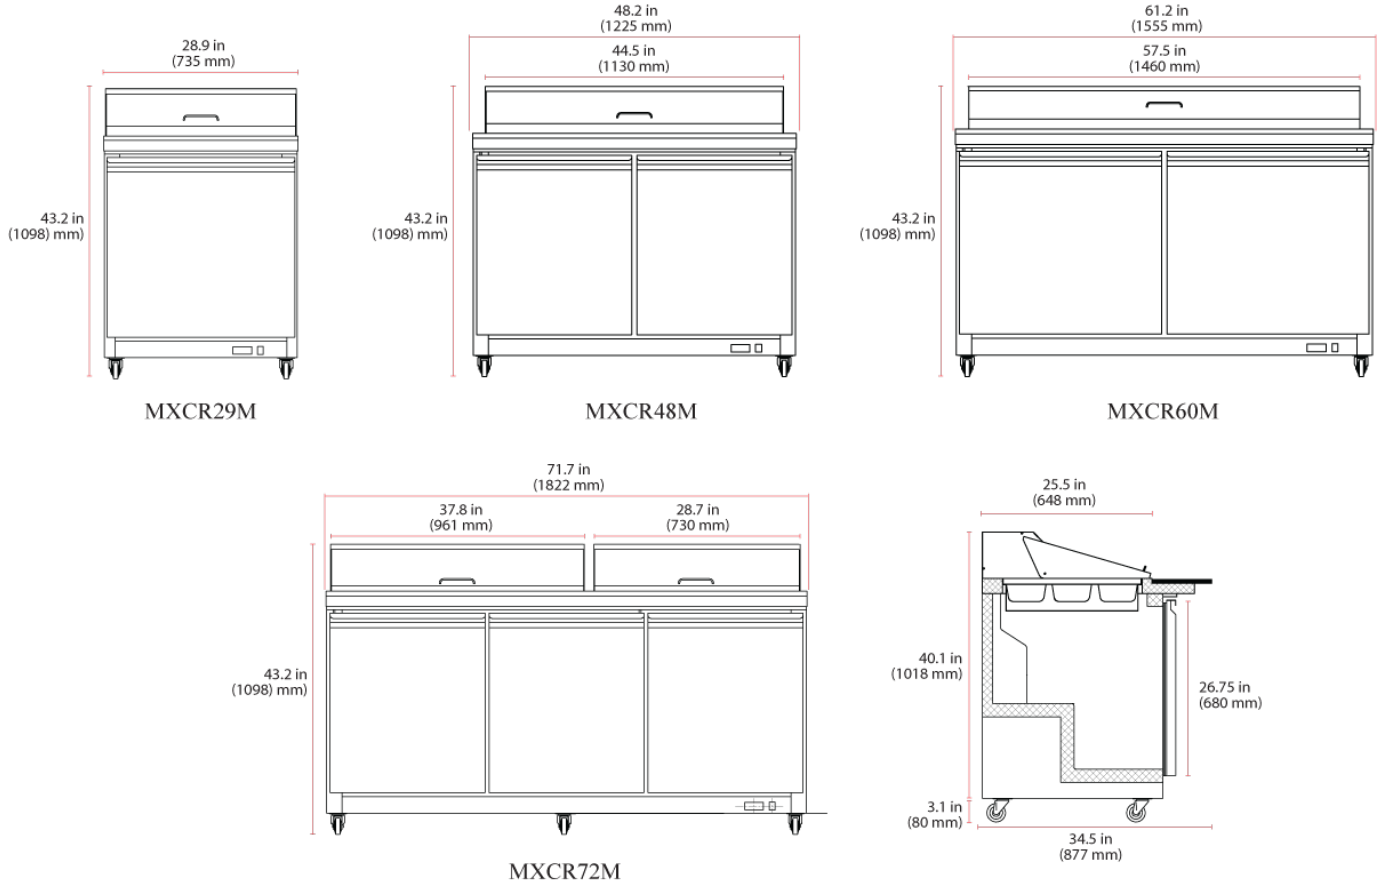

	Dimensions in / mm	Capacity	Temperature Range	Voltage	Unit Weight	Doors	Pans (1/6)
MXCR29M	28.9 x 34.5 x 43.2 735 x 877 x 1098	7 Cu Ft 198 L	33° - 41° F 1° - 5° C	120V/60Hz 220V/50Hz, 220V/60Hz	276 lb 125 kg	1	12
MXCR48M	48.2 x 34.5 x 43.2 1225 x 877 x 1098	12 Cu Ft 340 L	33° - 41° F 1° - 5° C	120V/60Hz 220V/50Hz, 220V/60Hz	313 lb 142 kg	2	18
MXCR60M	61.2 x 34.5 x 43.2 1555 x 877 x 1098	15.5 Cu Ft 439 L	33° - 41° F 1° - 5° C	120V/60Hz 220V/50Hz, 220V/60Hz	362 lb 164 kg	2	24
MXCR72M	71.7 x 34.5 x 43.2 1822 x 877 x 1098	18 Cu Ft 510 L	33° - 41° F 1° - 5° C	120V/60Hz 220V/50Hz	408 lb 185 kg	3	30

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.